

Transduction

SOHORAID Up to 8GB

TR-SR2 Series

TR-SR2 Large Capacity Low Cost RAID System



TR-SR2 Front




TR-SR2-WBS3



TR-SR2-SB3

Features

- 4TB in Safe (mirror) mode, 8TB in (fast) SPEED mode.
- Small compact size.
- No software drivers required.
- 10x faster with USB 3.0 port.
- USB 3.0, eSATA 3G/bit, Firewire 800 ports.
- Cost effective and safe storage.
- Easy configuration and LCD display monitor.
- Supports multiple HD video/audio streams.

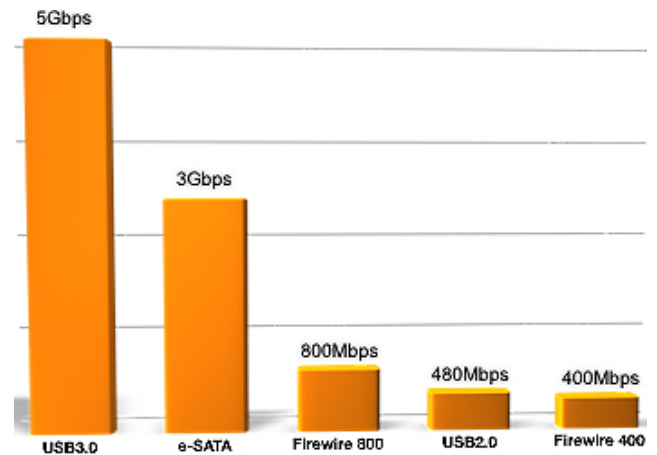

TR-SR2 Series

TR-SR2 Large Capacity Low Cost RAID System

Specification

Model

- TR-SR2-SB3
- TR-SR2-WBS3 - with 2 x Firewire 800 ports

Interface

- USB 3.0 port, eSATA and 2 x Firewire 800 ports (for TR-SR2-WBS3 model)

Compatible Drives

- 2 x 3.5" SATA III (6.0Gbits) HDD up to 4GB

Storage Mode

- RAID 1 protection or RAID 0 high speed

Cooling

- 1 x 6CFM low noise fan

System Monitoring

- Drive and data rebuild, temperature, fan and drive failures

Electrical & Operating Requirements

- 100-240VAC, 50/60Hz, max. 68W
- Operating temperature: 0°C - 50°C, 60°C for 2 hours (32°F - 122°F, 140°F for 2 hours)
- Storage temperature: -20°C - 75°C (-4°F - 167°F)
- Relative humidity: 10% - 90% non-condensing

Dimensions

- 122mm (W) x 102mm (H) x 205mm (D) (4.80" (W) x 4.02" (H) x 8.07" (D))

Weight

- 2.75kg (6.06lbs)

Package Accessories

- 1 x TR-SR2-SB3 or TR-SR2-WBS3
- 1 x USB 3.0 cable
- 1 x eSATA cable
- 1 x Firewire 800 (1394b) cable (for TR-SR2-WBS3 model)
- 1 x AC power cord
- Accessory kit
- User Manual

Warranty: 3 years, FOB Transduction Inc., Mississauga, ON Canada